

10/519272

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
8 January 2004 (08.01.2004)

PCT

(10) International Publication Number
WO 2004/002702 A1

(51) International Patent Classification⁷: B28B 7/30, 7/28,
E04G 15/06, B28B 23/00

(21) International Application Number:
PCT/NL2003/000478

(22) International Filing Date: 27 June 2003 (27.06.2003)

(25) Filing Language: Dutch

(26) Publication Language: English

(30) Priority Data:
1020949 27 June 2002 (27.06.2002) NL

(71) Applicant (for all designated States except US): CON-
NECTOR VINKEVEEN B.V. [NL/NL]; Voorbancken
12a, NL-3645 GV Vinkeveen (NL).

(72) Inventor; and

(75) Inventor/Applicant (for US only): VAN RIJN, Robertus,
Cornelis, Maria [NL/NL]; Voorbancken 12a, NL-3645
GV Vinkeveen (NL).

(74) Agent: VAN WESTENBRUGGE, Andries; Nederland-
sch Octrooibureau, Scheveningseweg 82, P.O. Box 29720,
NL-2502 LS The Hague (NL).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: METHOD FOR ARRANGING ENGAGEMENT MEANS IN A CONCRETE PART

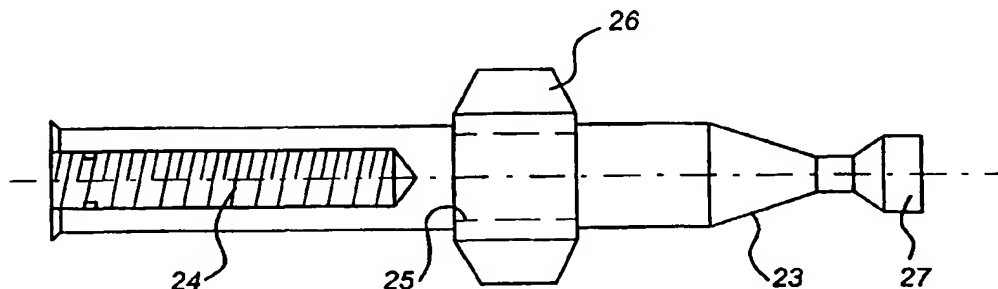

(57) Abstract: Method for arranging engagement means in a concrete body. These engagement means can come into contact with securing means, resulting in a coupling of considerable strength between the concrete part and the said securing means. The engagement means may comprise a screw thread, bayonet-like structure or the like arranged in the concrete. However, it is also possible for the engagement means to be designed as a separate component which is placed into the concrete material. This separate component is then provided with the engagement means proper in that it is provided with a screw thread, bayonet catch or the like. In this way, it is possible to secure construction parts to the concrete part, to hoist the concrete part and to carry out further actions with this part. It is also possible to adjust the concrete part with the aid of adjustment bolts which engage in the engagement means.